


# Cool RoadRunner-PM

## PC/104-Plus Single Board Computer

### Intel® Pentium® M Processor

### 0.6/1.0/1.4/1.8 GHz

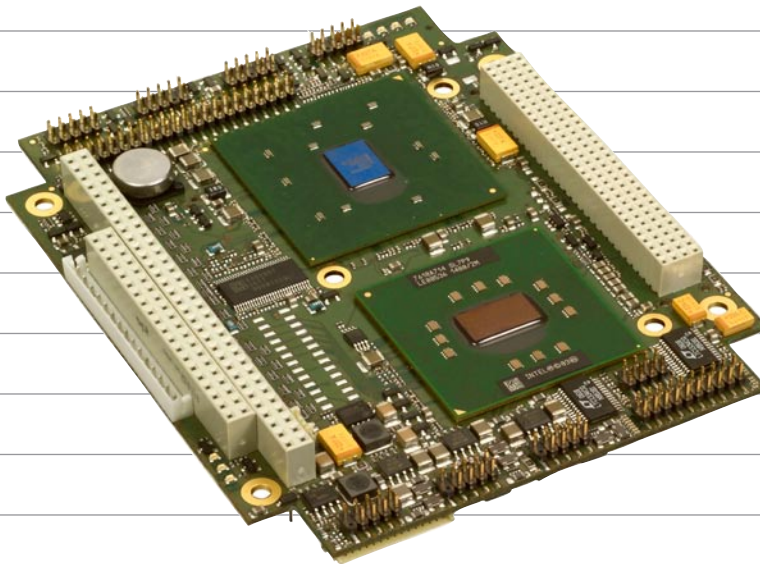

#### Features

Intel® Pentium® M or Celeron® M Processor
Up to 1 Gbyte DDR-SODIMM
SXGA: 2048 x 1536 pixel
Dual channel LVDS for displays
100/10 BaseT Ethernet
6 x USB 2.0
2 x RS252, RS485
AC97 Sound I/O
Power consumption: max. 18 W
Passive cooling possible
Extended temperature range @ 1.0 GHz

The Cool RoadRunner-PM provides embedded PC applications with the computing power of the Pentium®M 7xx processor. It is a complete single board computer, build according to the PC/104-Plus standard. There are several processor variants with different clock rates available: Pentium M 738 @ 1.4 GHz and Pentium® M 745 @ 1.8 GHz, and a Celeron M 373 @ 1.0 GHz. The Cool RoadRunner-PM's i82855GME chipset features a fast Intel Extreme Graphics 2 graphics engine with 2D and 3D capabilities, delivering outstanding graphics performance for embedded computer applications. The main memory can be expanded up to 1 GByte using suitable DDR-SODIMM modules. As for network connectivity, there is a FastEthernet (100/10BaseT) controller integrated on board. There are two serial ports available.

The Cool RoadRunner-PM supports both, PCI and ISA bus for system extension.

An AC-97 codec is also on-board for sound I/O. The ATA-100 compliant EIDE interface allows connection of standard hard disks or other storage devices.

The graphics and display controllers use up to 64 MB of memory, shared with the system RAM. An improved unified memory architecture (UMA) guarantees the maximum possible display performance. Display resolutions as high as 2048 x 1536 at 75 Hz are supported. In addition to ordinary SVGA-monitors, all kinds of TFT Flat Panels can be connected through the dual channel LVDS interface.

Troubleshooting is made easy with supervision LEDs for power, watchdog, Ethernet and life signalization on the module. System expansion is very easy using the PCI-104 bus.

#### More Features

- Watchdog
- Flash BIOS
- GoldCap for RTC backup



LiPPERT is an independent design house and manufacturer that develops and builds special customer specific solutions. Please ask for a specific quotation.

LiPPERT Embedded Computers GmbH  
 Hans-Thoma-Str. 11  
 D-68163 Mannheim  
 Phone +49 621 43214-0 · Fax +49 621 43214-30  
 sales@lippert-at.com · www.lippert-at.com

LiPPERT Embedded Computers Inc.  
 5555 Glenridge Connector, Suite 200  
 Atlanta, GA 30342  
 Phone (404) 459 2870 · Fax (404) 459 2871  
 ussales@lippert-at.com · www.lippert-at.com

**LiPPERT**  
*the embedded PC Company*

# Cool RoadRunner-PM

## PC/104-Plus Single Board Computer

### Intel® Pentium® M Processor 7xx

### 0.6/1.0/1.4/1.8 GHz



#### Technical Specifications

<b>Board Format</b>	PC/104-Plus, 115.6mm x 95.9mm	<b>Sound I/O</b>	AC97 (Line-in, Line-out, Mic-in, CD-in) S/PDIF 2.3 compliant
<b>Processor</b>	Intel® Pentium® M, Intel® Celeron® M	<b>RTC Backup</b>	GoldCap
<b>Speed</b>	1.8 GHz with Pentium® M 745 processor 1.4 GHz with Pentium® M 738 processor 1.0 GHz with Celeron® M 373 processor 0.6 GHz with Celeron® M 373 processor	<b>Watchdog</b>	yes
<b>FSB</b>	400 MHz	<b>Status LED</b>	Power, Watchdog, Ethernet, IDE and life signalization
<b>Core logic</b>	Northbridge: Intel® i82855GME Southbridge: Intel® i82801DB Super I/O: National PC87364 PCI to ISA bridge: IT8888	<b>ISA Bus</b>	PC/104
<b>RAM (max.)</b>	1024 Mbyte DDR-SODIMM	<b>PCI Bus</b>	5 V compliant.
<b>RAM clock</b>	Below 512 MB: PC2700/333 MHz 1024 MB: PC2100/266 MHz	<b>Power Supply</b>	+5 V only. All necessary voltages are generated on-board.
<b>Graphics</b>	up to 64 MB RAM, up to 2048 x 1536 pixel at 75 Hz	<b>Power Consumption (maximum)</b>	0.6 GHz: ~14.0W 1.0 GHz: ~16.0 W 1.4 GHz: ~23.5 W 1.8 GHz: ~32.5 W
<b>CRT</b>	Analog VGA	<b>Power Management</b>	BIOS supports ACPI power saving modes
<b>LVDS</b>	Dual channel	<b>Operating temperature</b>	-20°C ... +60°C (standard, all versions) -40°C ... +85°C (extended, only Celeron M)
<b>USB</b>	6 x USB 2.0	<b>MTBF</b>	t.b.d.
<b>Ethernet</b>	100/10 BaseT with i82562	<b>Cooling</b>	The Cool RoadRunner-PM must always be operated with sufficient cooling measures. Warranty will be void if operated without cooling.
<b>Serial</b>	2 x RS232, RS485	<b>BIOS</b>	Phoenix FirstBIOS BIOS parameters are also saved in FEPROM
<b>Keyboard, Mouse</b>	PS/2	<b>Supported OS</b>	Windows, Linux
<b>IDE</b>	EIDE port according to ATA100		

All mentioned trademarks are the properties of their respective holders.

#### Ordering Information

Ordering Number	Description
803-0015-10	PC/104-Plus board with 1.8 GHz Intel® Pentium® M 745, active cooler, DIMM socket max. 1 GB DDR-RAM, 6xUSB, IrDA, RTC, GoldCap, IDE, 2xCOM, PS/2 keyboard and mouse, watchdog, FastEthernet, LVDS, AC97 sound
803-0014-10	Like 804-0015-10 but with 1.4 GHz Intel® Pentium® M 738
803-0013-10	Like 804-0014-10 but with 1.0 GHz Intel® Celeron® M 373
803-0017-10	Like 804-0014-10 but with 600 MHz Intel® Celeron® M 373

**Note:** *f* denotes the temperature range. Substitute with 8 for standard and 9 for extended temperature range

LiPPERT Embedded Computers GmbH  
Hans-Thoma-Str. 11  
D-68163 Mannheim  
Phone +49 621 43214-0 · Fax +49 621 43214-30

LiPPERT Embedded Computers Inc.  
5555 Glenridge Connector, Suite 200  
Atlanta, GA 30342  
Phone (404) 459 2870 · Fax (404) 459 2871

**LiPPERT**  
the embedded PC Company

09/07 - Specifications subject to change without notice - ©LiPPERT GmbH - Printed in Germany